


POS NO	SIZE OF CONN.	PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M ³ /H
--------	---------------	---------	---------	------------------	--




CONNECTIONS:.....HOSE
 MAXIMUM 2 HOSES TO BE USED PER SHIP / SHORE CONNECTION
 BUNKERS:.....BY BARGE
 FRESH WATER:.....BY BARGE

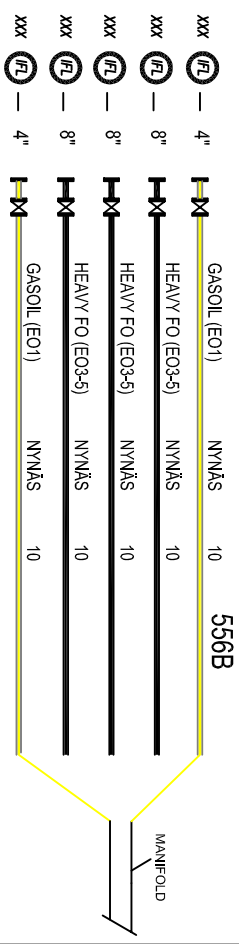

2	LV	2011-03-18
REVISION NO	SON	REVISION DATE
MANIFOLD ARRANGEMENT SKARVIK BERTH 556B		
ORIGIN DATE	DRAWN	SCALE
10-07-20	MVA	
DRAWING NO 7-45550B		

MAX DRAUGHT: 7.3 M
 MAX LOA: 110 M
 UKC: ...0.5 M

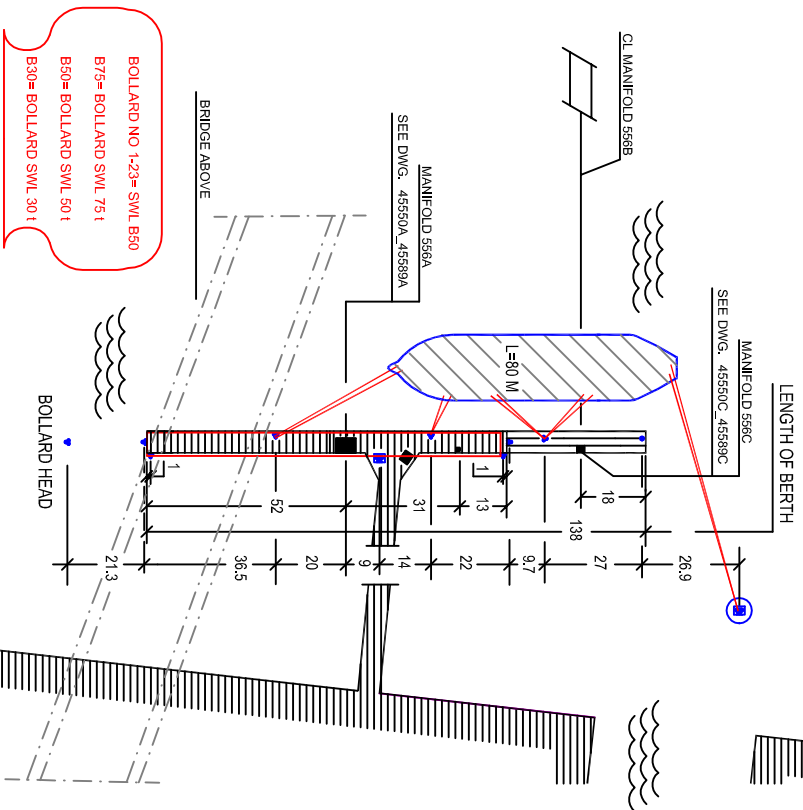

PRIOR LOADING:
 DECLARATION OF PREVIOUS CARGO TO BE DONE BEFORE ENTERING PORT OF GÖTEBORG.
 MAXIMUM ALLOWABLE CONCENTRATION OF H2S IS 50 PPM AND FOR MERCAPTAN THE MAXIMUM ALLOWABLE CONCENTRATION IS 0.5 PPM IN TANK ATMOSPHERE.



	LV	2011-03-18
REVISION NO	SON	REVISION DATE
RECOMMENDED MINIMUM MOORINGARRANGEMENT SKARVIK BERTH 556B		
ORIGIN DATE	DRAWN	SCALE
10-07-20	MVA	
DRAWING NO 79-45589B		

PORT OF GÖTEBORG		

PORT OF GÖTEBORG		