



BERTH 511

MAX DRAUGHT (MW):	11.5 M	MAX/MIN MANIFOLD HEIGHT	
MAX LOA:	200 M	ABOVE WATERLINE (MW):	17.6/3.2 M
MAX BREADTH:	N/A	QUAY DECK HEIGHT (MW):	3.5 M
UKC:	0.5 M	MAX BCM/SCM:	103 M
MIN. PARALLEL BODY**:	45 M	MAX DISPLACEMENT:	N/A
MIN. FREEBOARD (MW):	N/A	MAX SPEED:	N/A

** Min. parallel body, 45 m, of which at least 32 m needs to be from ship's connected manifold to stern or forward depending on side alongside.

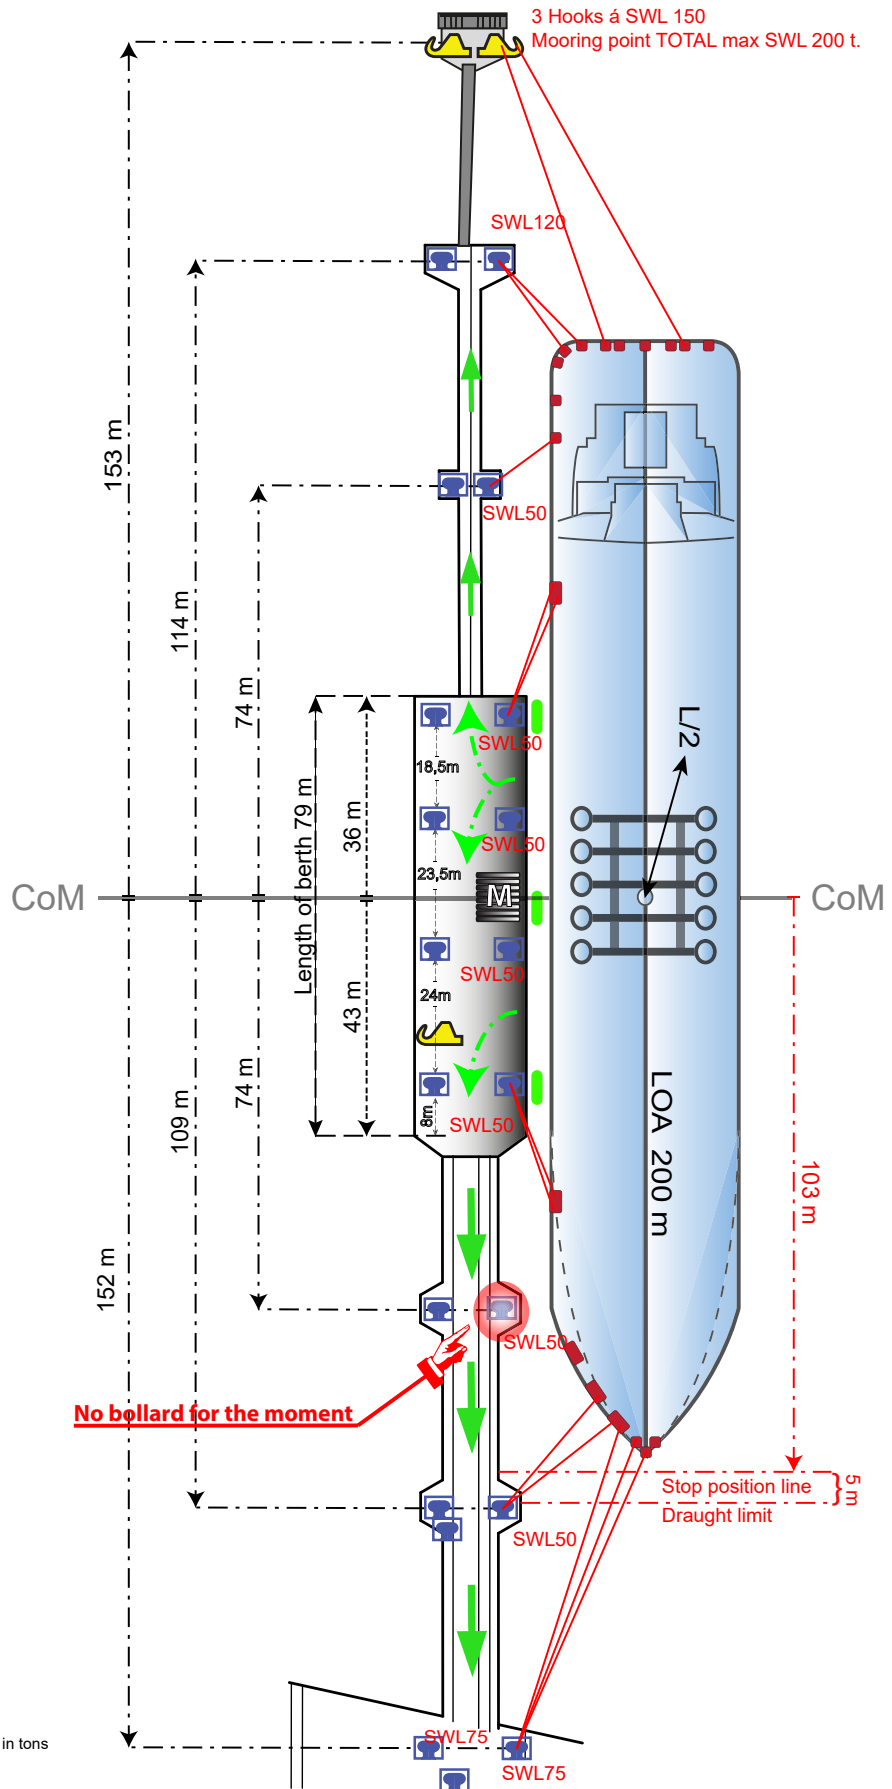

- MANIFOLD
- DOLPHIN
- FENDER
- HOOK (h)
- BOLLARD } SWL = Safe Working Load in tons
- EMERGENCY EXIT
- CoM CENTER OF MANIFOLD

	 N	BERTH DIRECTION 033° / 213°	MOORING PLAN SKARVIK BERTH 511			BERTH / DRAWING NO BERTH511	APPROVED BY CL
		REV. DATE / DATE 2022-10-27	DRAWN MAFLOBE	SCALE /			