


BERTH 519

MAX DRAUGHT (MW):	12.50 M	MAX/MIN MANIFOLD HEIGHT	
MAX LOA:	280 M	ABOVE WATERLINE (MW)	
MAX BREADTH:	N/A	Hardarm 1-6:	15.6 / 2.0 M
UKC:	0.5 M	Hardarm 7:	17.6 / 2.0 M
MIN PARALLELL BODY:	26 M	QUAY DECK HEIGHT (MW):	3,5 M
MIN FREEBOARD (MW):	N/A	MAX BCM/SCM:	N/A
		MAX DISPLACEMENT:	N/A
		MAX SPEED:	N/A

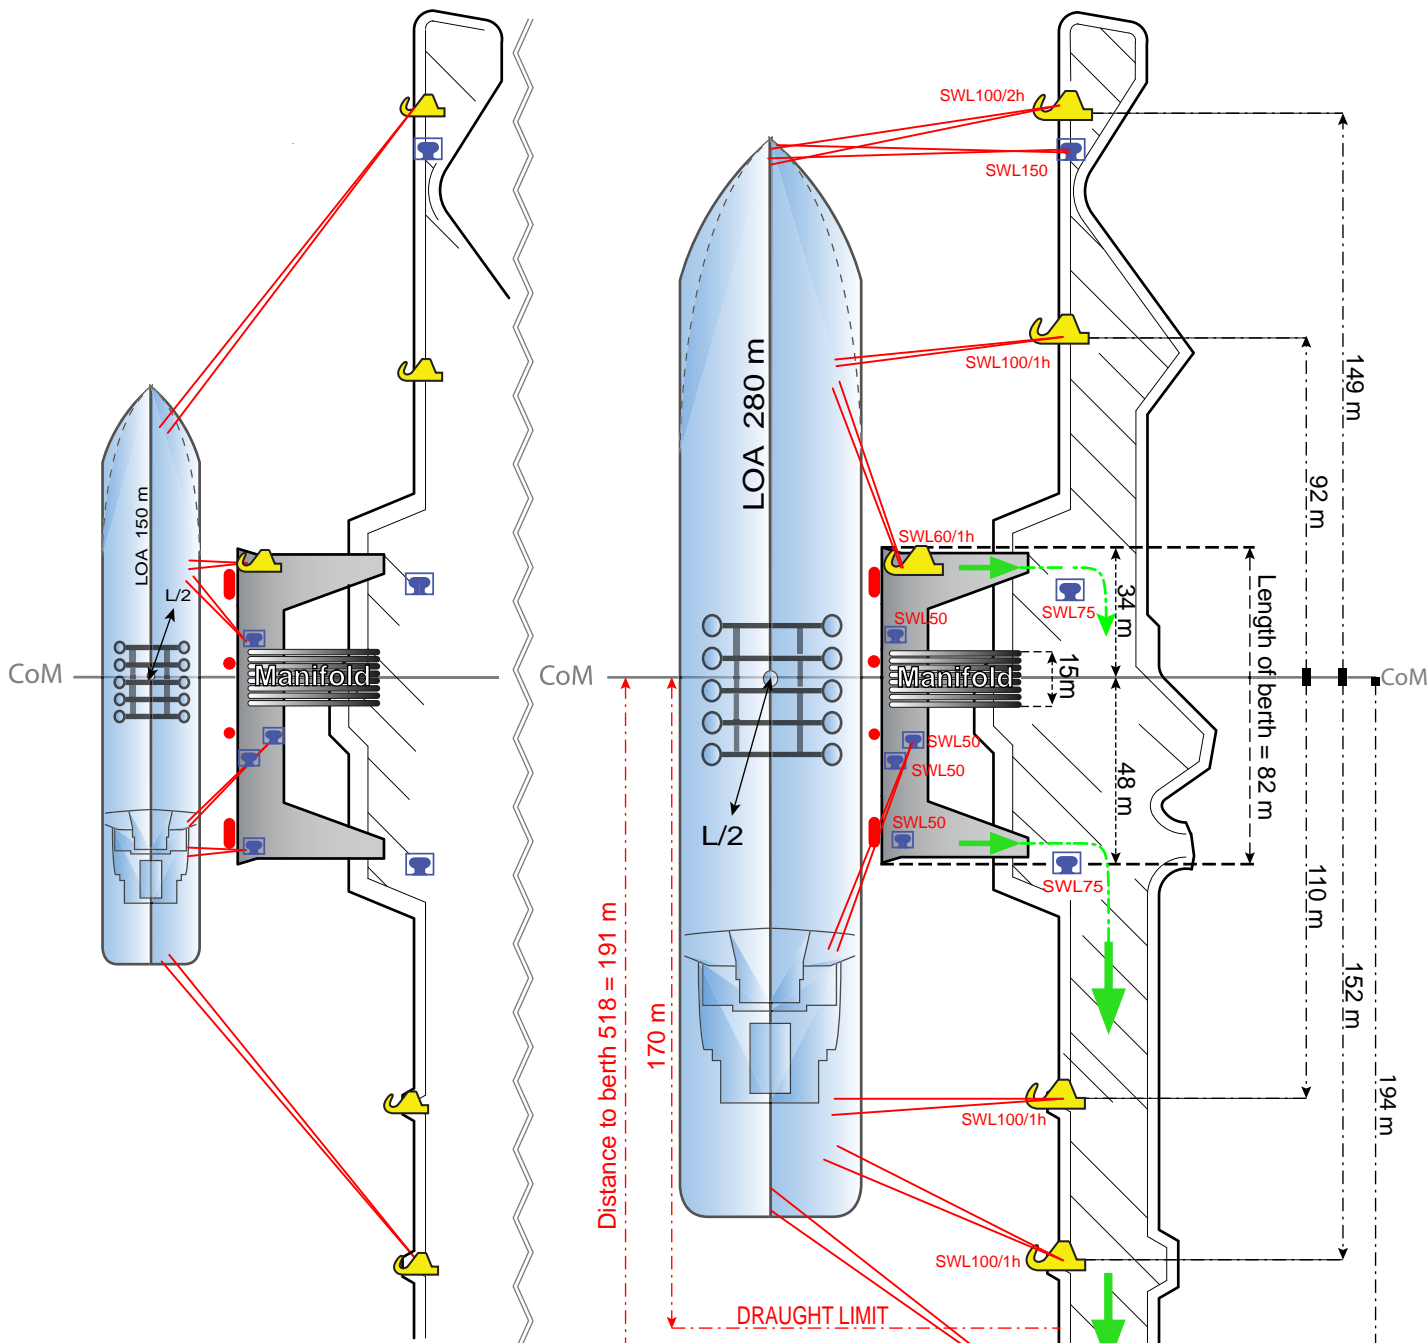

100 M
50
0

SCALE


- MANIFOLD
- DOLPHIN
- FENDER
- HOOK (h)
- BOLLARD

SWL = Safe Working Load in tons

- EMERGENCY EXIT
- CoM CENTER of MANIFOLD

	<p>N</p>	BERTH DIRECTION 017° / 217°	MOORING PLAN SKARVIK BERTH 519			BERTH / DRAWING NO BERTH519	APPROVED BY CL
		REV. DATE / DATE 2018-04-04	DRAWN MAFLOBE	SCALE			

HARD ARM No.	SIZE OF CONN.	PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M3/H
--------------	---------------	---------	---------	------------------	---------------------------------------

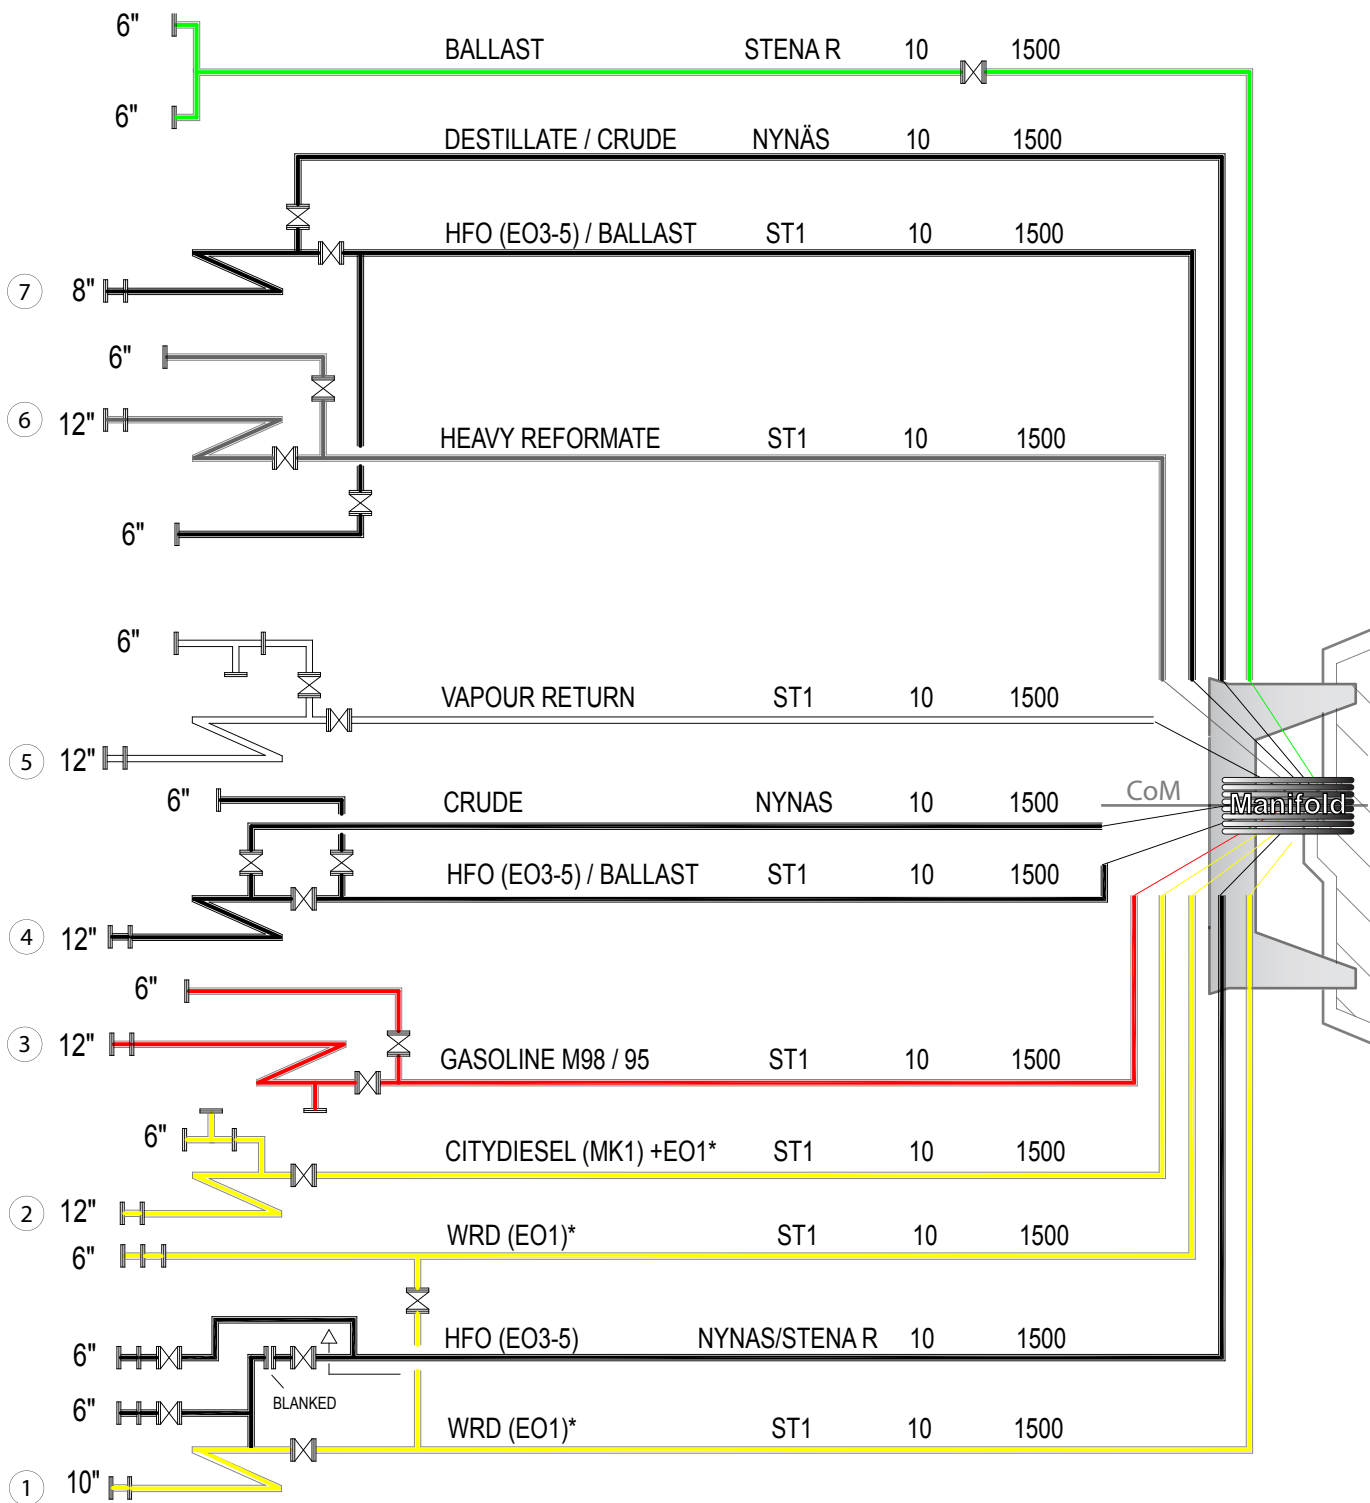

- ① = Hard arm No.
- = Hard arm symbol
- = Hose symbol

Hard arm connections $\geq 8"$
Hose connections $\leq 6"$

Bunkers available by barge
Fresh water available
Maximum 2 hoses to be used
per ship/shore connection