
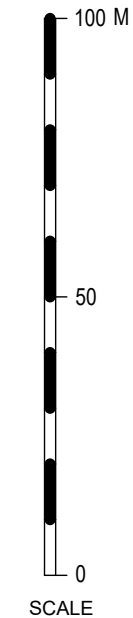


BERTH 511

MAX DRAUGHT (MW):	11.5 M	MAX/MIN MANIFOLD HEIGHT	
MAX LOA:	200 M	ABOVE WATERLINE (MW):	17.6/3.2 M
MAX BREADTH:	N/A	QUAY DECK HEIGHT (MW):	3.5 M
UKC:	0.5 M	MAX BCM/SCM:	103 M
MIN. PARALLEL BODY**:	45 M	MAX DISPLACEMENT:	N/A
MIN. FREEBOARD (MW):	N/A	MAX SPEED:	N/A


** Min. parallel body, 45 m, of which at least 32 m needs to be from ship's connected manifold to stern or forward depending on side alongside.

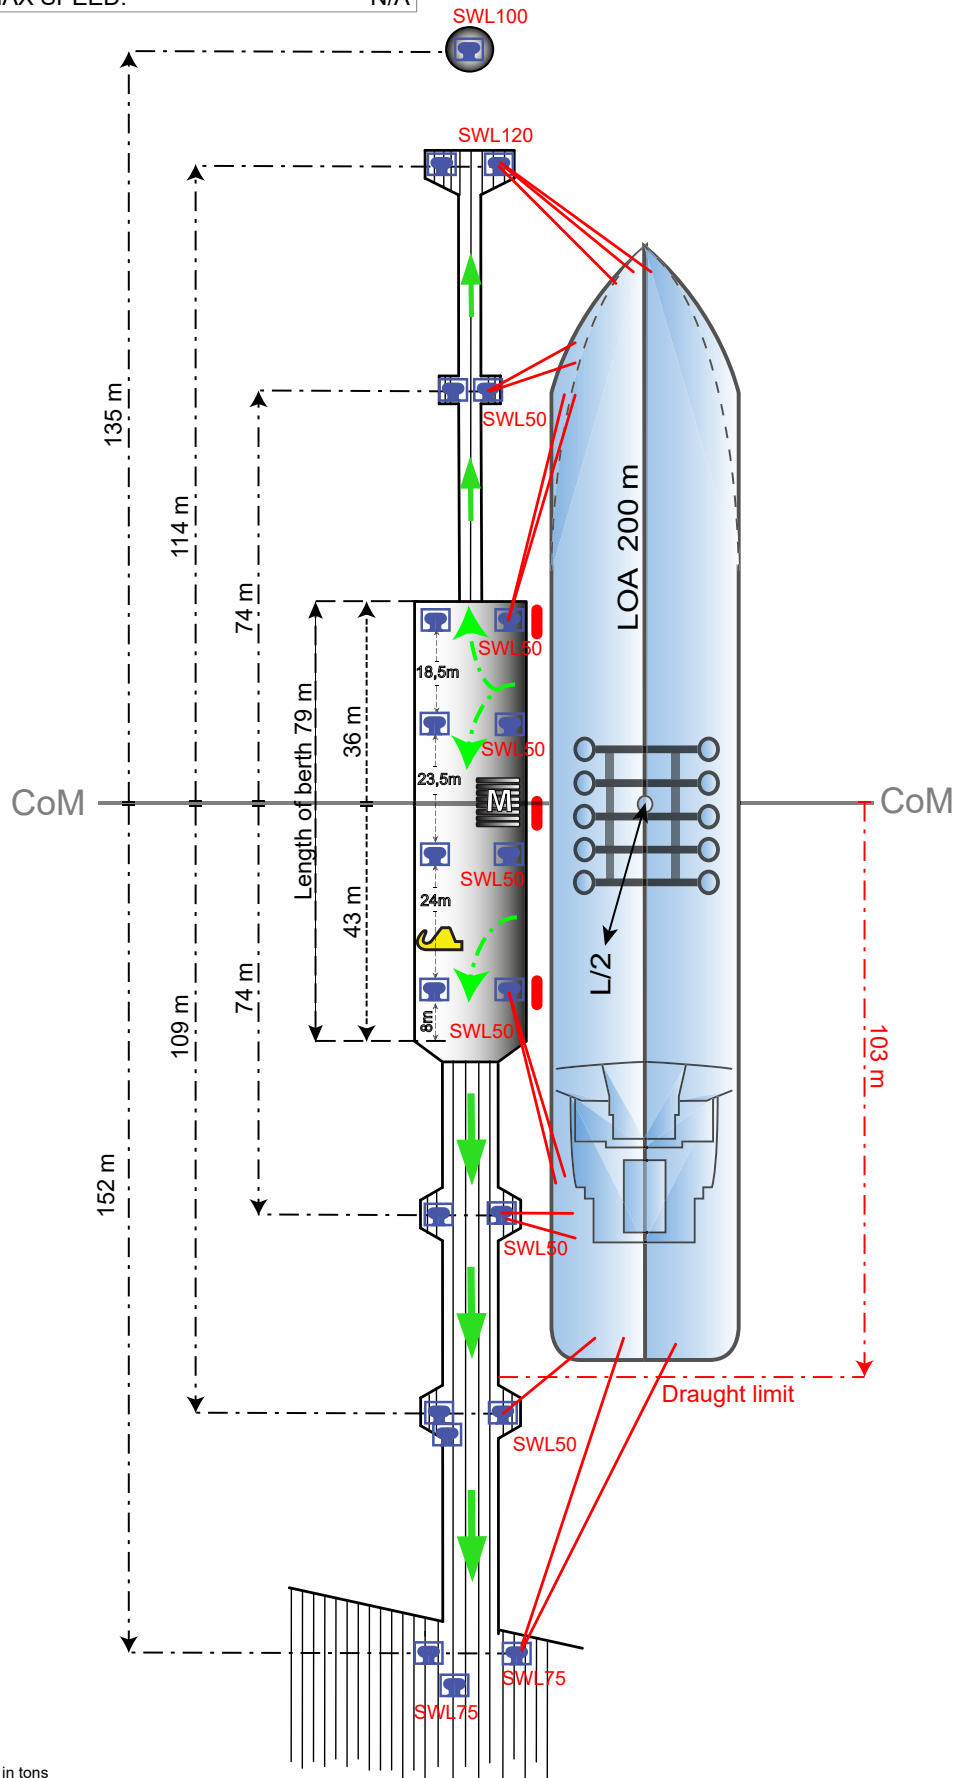

- MANIFOLD
 - DOLPHIN
 - FENDER
 - HOOK (h)
 - BOLLARD
 - EMERGENCY EXIT
 - CoM CENTER of MANIFOLD
- } SWL = Safe Working Load in tons



	 N	BERTH DIRECTION 033° / 213°	MOORING PLAN SKARVIK BERTH 511			BERTH / DRAWING NO BERTH511	APPROVED BY CL
		REV. DATE / DATE 2019-05-20	DRAWN MAFLOBE/	SCALE /			

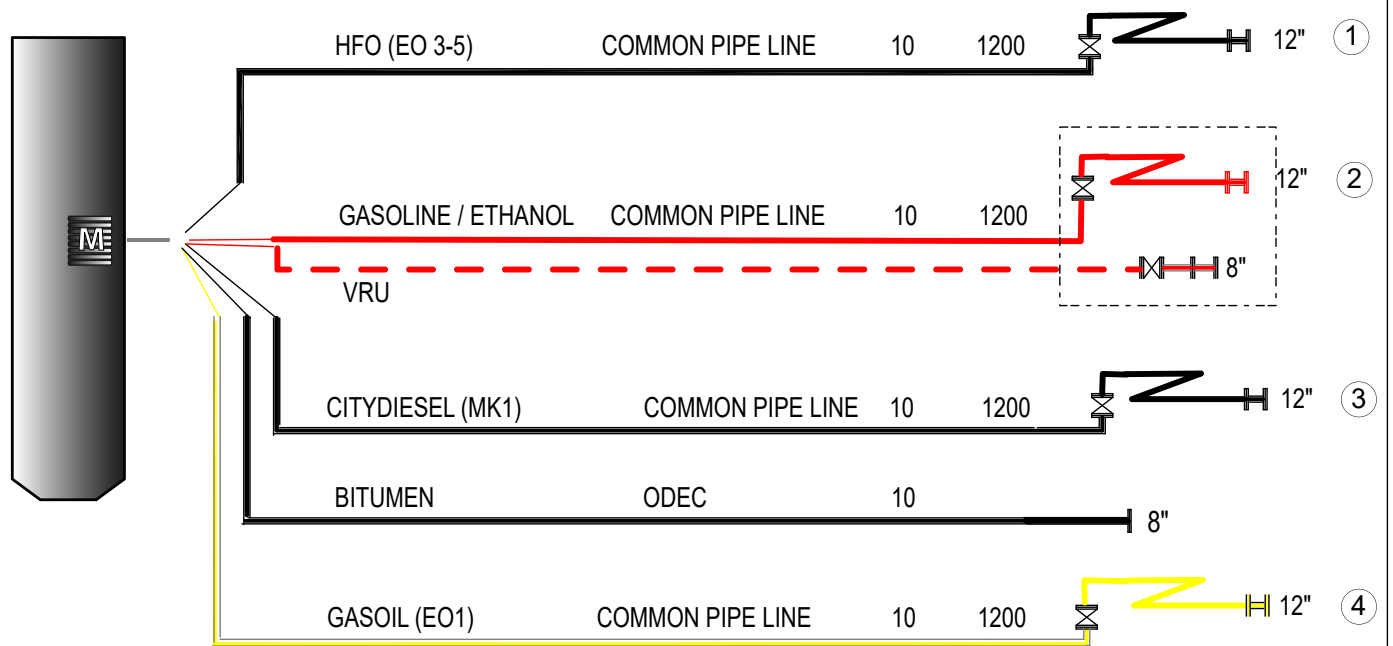

PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M3/H	SIZE OF CONN.	No.
---------	---------	------------------	---------------------------------------	---------------	-----





Hard arm connections ≥ 8"
Hose connections ≤ 6"

Bunkers available by barge
Fresh water available
Maximum 2 hoses to be used per ship/shore connection

- ① = Hard arm No.
-  = Hard arm symbol
-  = Hose symbol

	 N	BERTH DIRECTION 033° / 213°	MANIFOLD ARRANGEMENT SKARVIK BERTH 511			BERTH / DRAWING NO BERTH511	APPROVED BY CL
		REV. DATE /DATE 2017-03-31/ 07-04-11	DRAWN MAFLOBE	SCALE /	BERTH / DRAWING NO BERTH511		

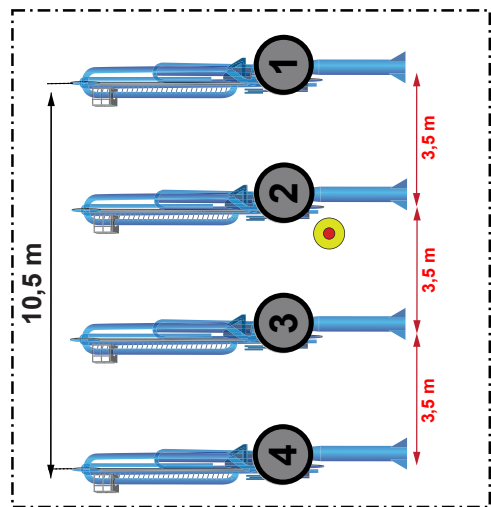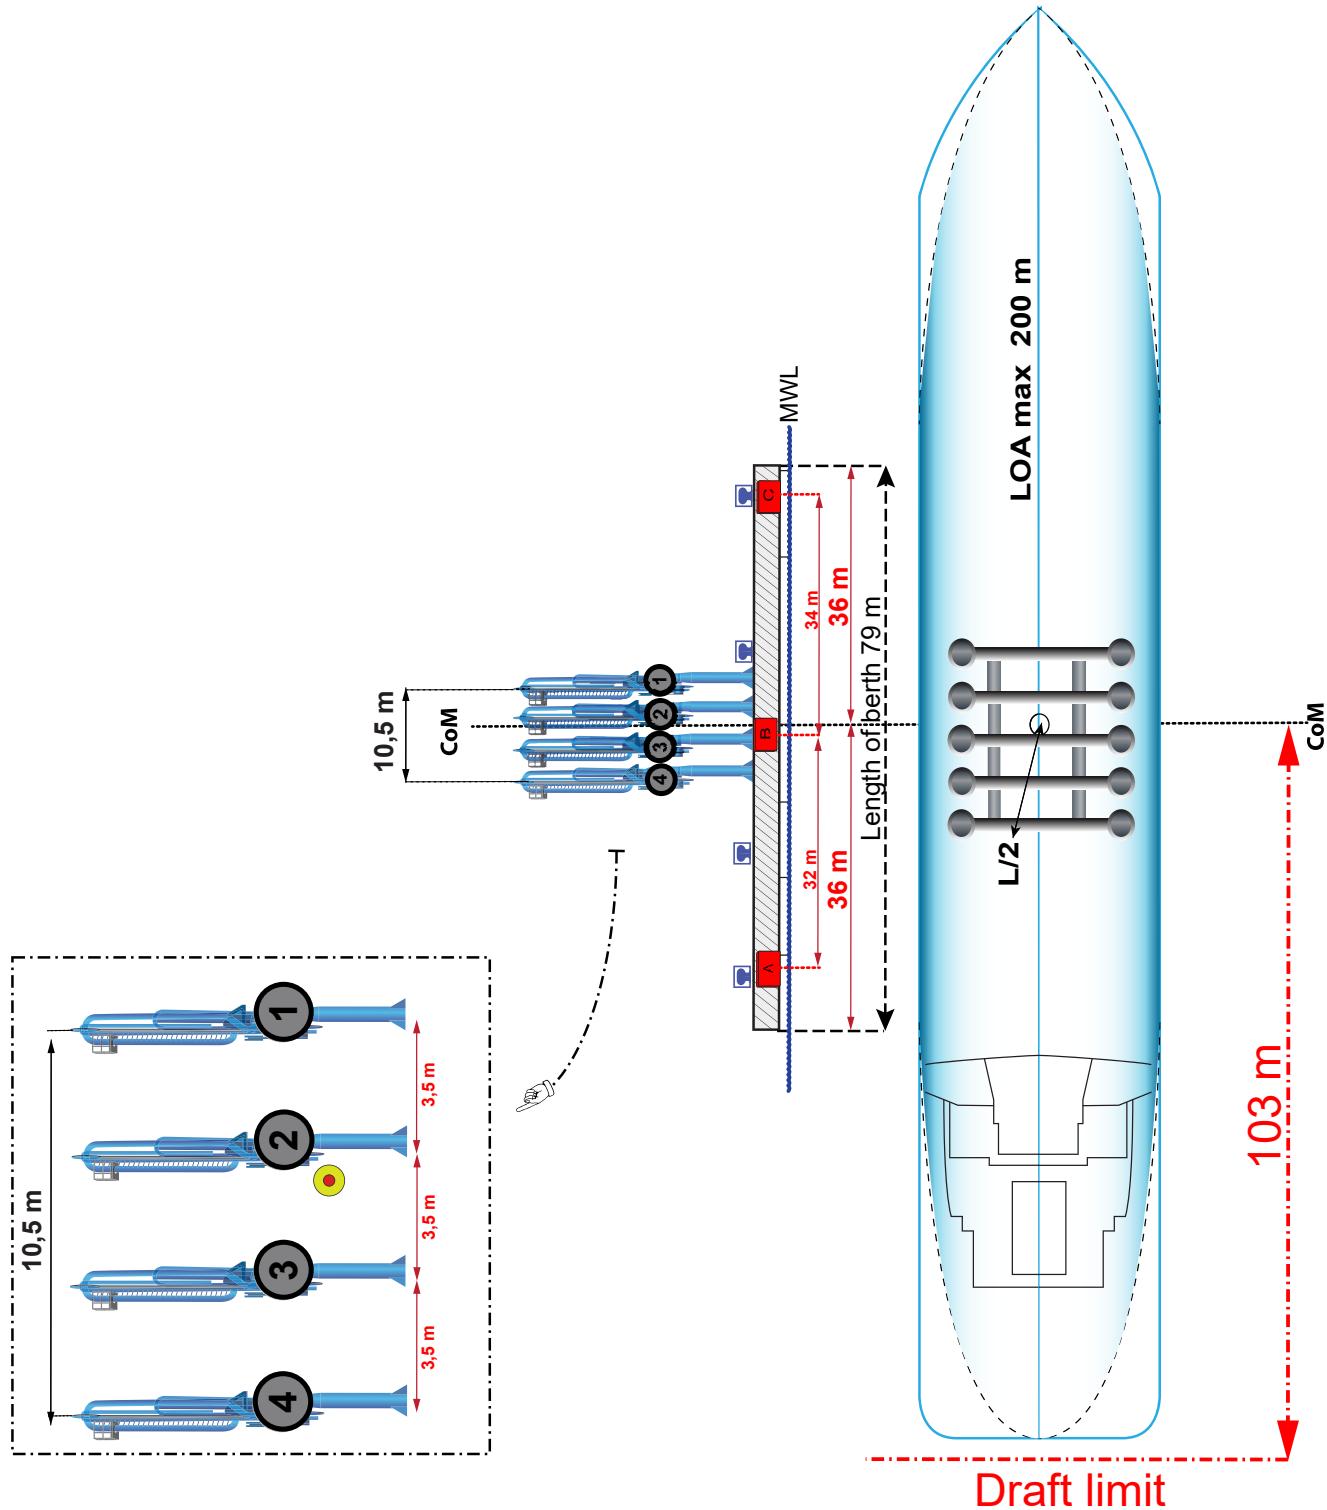

- Loading arm No.
- VRU Connection
- BOLLARD
- HOOK
- FENDER
- CoM** CENTRE of MANIFOLD

