



POS NO	SIZE OF CONNECTION	PRODUCT	COMPANY	MAX PRESSURE BAR	MAX LOADING/DISCHARGING CAPACITY M ³ /H
--------	--------------------	---------	---------	------------------	--

CONNECTIONS:.....HARDARMS / HOSE BOLTED FLANGES (DIN)
 MAX 2 HOSES TO BE USED PER SHIP / SHORE CONNECTION
 BUNKERS:.....BY BARGE
 FRESH WATER:.....AVAILABLE

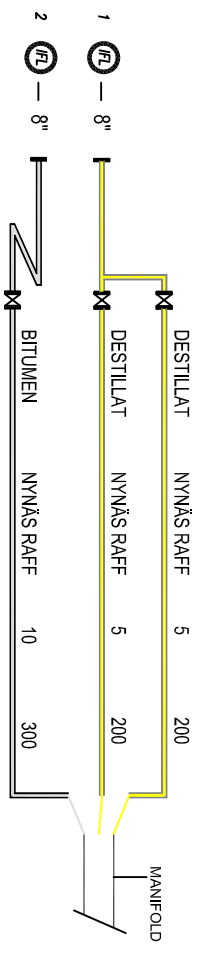

 PORT OF GÖTEBORG	ORIGIN DATE	07-04-17	DRAWN	MVA	SCALE	DRAWING NO	7-45596
	REVISION NO	3	MANIFOLD ARRANGEMENT SKARVIK BERTH 644		SIGN	MV	2011-03-18

MAXIMUM MANIFOLD HEIGHT ABOVE WATERLINE: 11.5 M (at mw)
 MAX DRAUGHT: 7.6 M
 MAX LOA: 135 M
 MIN PARALLELL BODY: 10 M
 UKC: 1.0 M

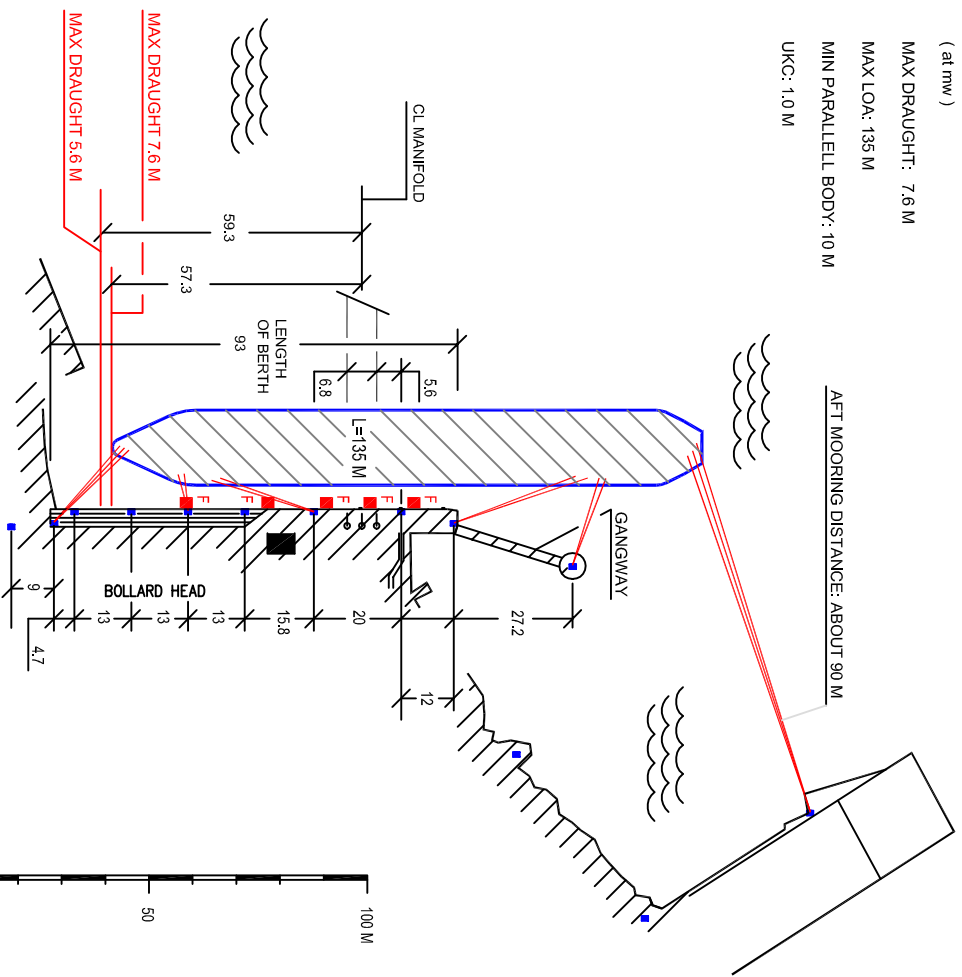

PRIOR LOADING:
 DECLARATION OF PREVIOUS CARGO TO BE DONE BEFORE ENTERING PORT OF GÖTEBORG.
 MAXIMUM ALLOWABLE CONCENTRATION OF H2S IS 50 PPM AND FOR MERCAPTAN THE MAXIMUM ALLOWABLE CONCENTRATION IS 0.5 PPM IN TANK ATMOSPHERE.

 PORT OF GÖTEBORG	ORIGIN DATE	07-03-27	DRAWN	MVA	SCALE	DRAWING NO	79-45594
	REVISION NO	5	RECOMMENDED MINIMUM MOORINGARRANGEMENT SKARVIK BERTH 644		SIGN	MV	2011-03-18